

traptice® insect

Overview Requirements

- Connection: WiFi (at least -70dbm) WiFi tested and WiFi key available
- App setup: with WAINS traptice® Companion App setup via Bluetooth
- Encryption type: WPA or WPA2
- Location: protect from moisture, sun and shocks
- Environment: max. 50 °C & max. 90 % humidity




In order to successfully integrate the traptice® insect devices into your operation, the following requirements must be fulfilled. Important is a stable WiFi connection and the placement of the devices.

A sufficiently strong WiFi connection must be available at the location (at least -70 dbm). You can check the connection in the traptice companion app. A permanent Internet connection must be available.

Instruction manual / traptice® Service Desk:
<https://meetnow.atlassian.net/servicedesk/customer/portal/8>

Included in delivery:

- traptice® insect + Monitoring box
- Sticky surface Monitoring
- Attractant tablet
- Adhesive pad for attaching the trap
- Battery AA 4x

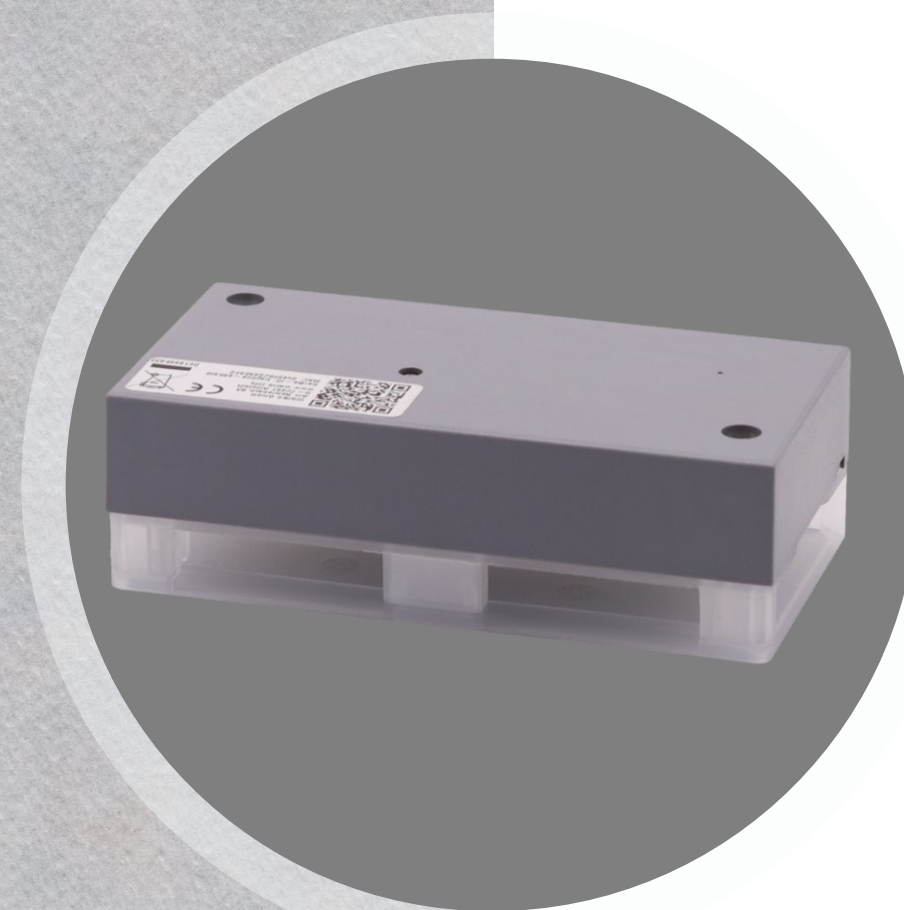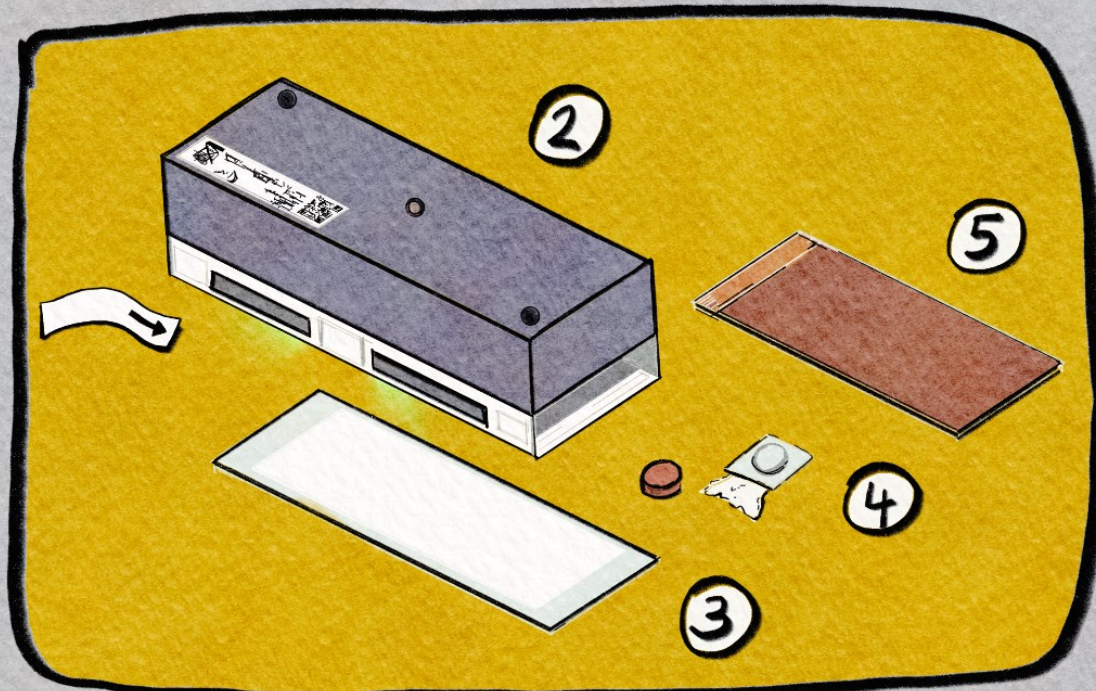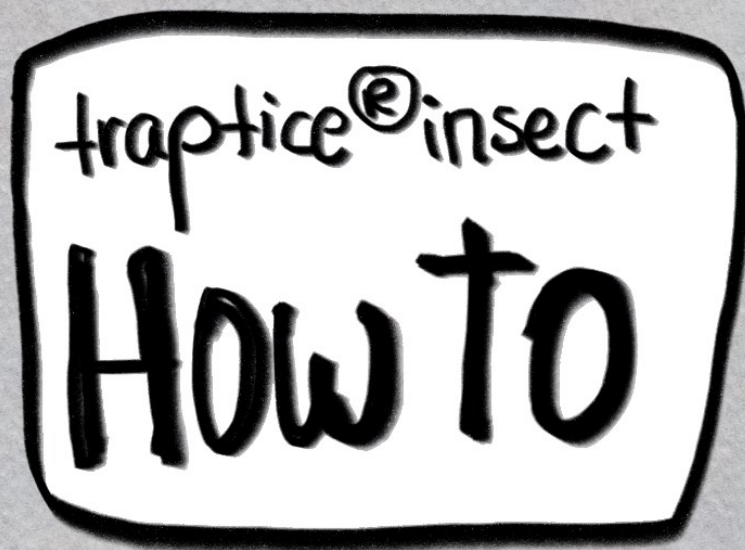

- ① WAINS Cloud
- ② traptice® insect + Monitoring box
- ③ Sticky surface Monitoring
- ④ Attractant tablet
- ⑤ Adhesive pad for attaching the trap
- ⑥ traptice® Companion App

Quick Guide // traptice® insect



WAINS Cloud Login

<https://traptice.wains.info>

Access data will be sent by email.



iOS

Android

Install App


IMPORTANT:
Allow location services. Switch on Bluetooth.

Scan me:




Instructions / traptice® Service Desk

<https://support.wains.info>

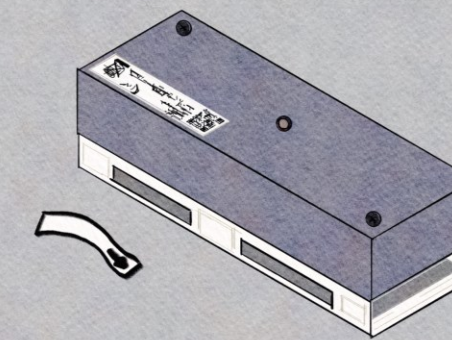


traptice® insect / turn me on

Pull battery isolator & start up device.
Have traptice® insect accessories ready.

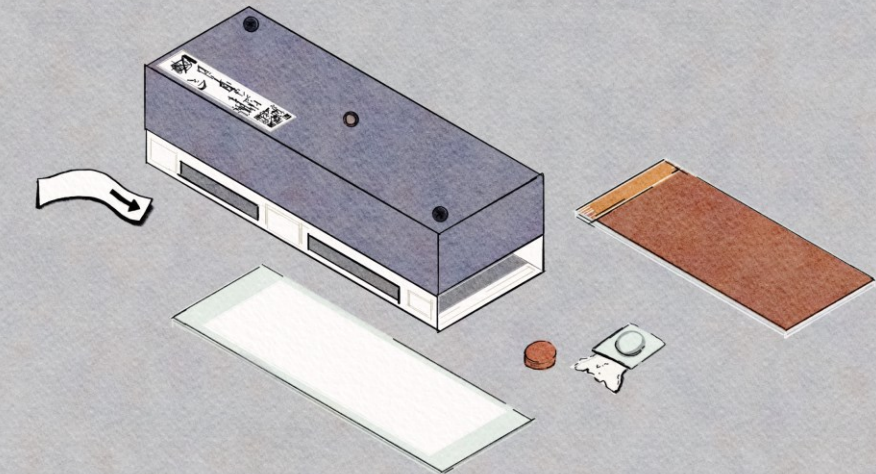

traptice® insect accessories

traptice® insect monitoring sticky surface and insert
desired attractant tablets / pheromone. Adhesive
pad for wall mounting optional.

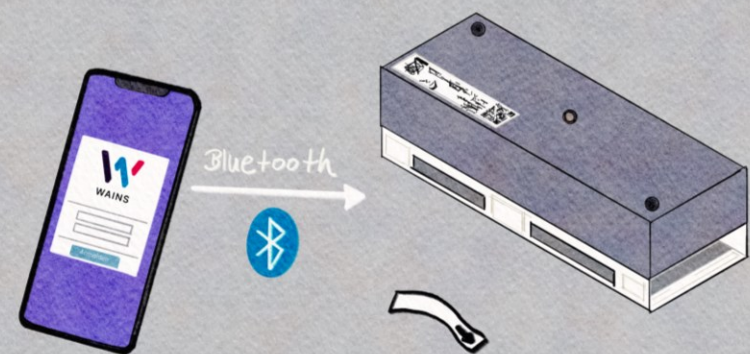


Provision via app

The connection to the traptice traptice® insect is
established via Bluetooth in order to provision it.



Internet / WiFi Connection


Connect to existing WiFi.
Observe the requirements in the instructions in the
traptice® Service Desk.

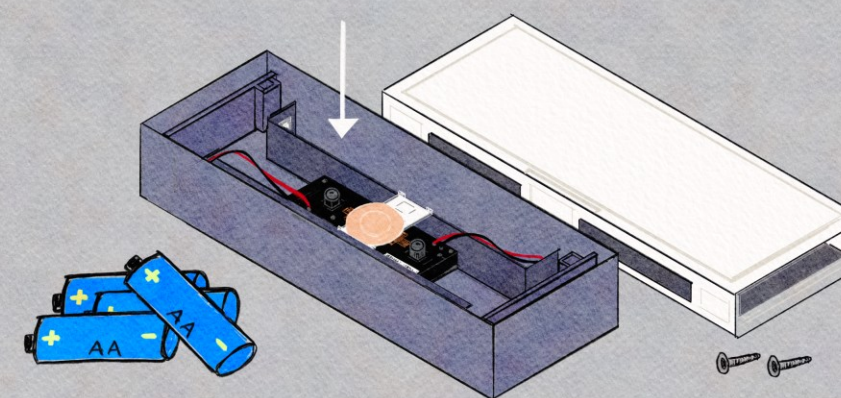

4 x AA


Battery change possible

Batteries easily replaceable. 4 x AA battery or
rechargeable batteries.

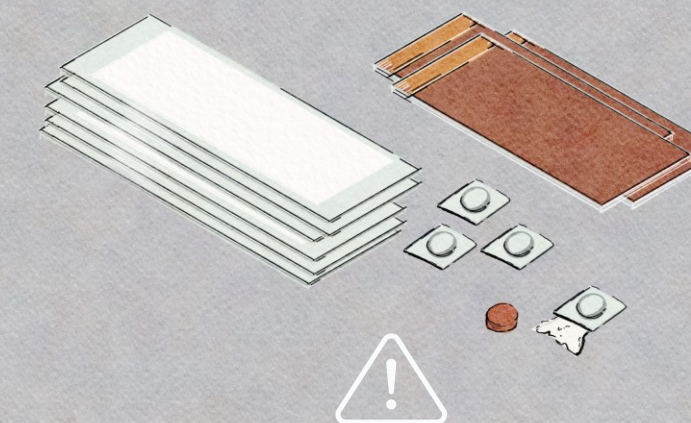

Accessories reorderable

Please note the compatibility of the monitoring
sticky surfaces to the device.

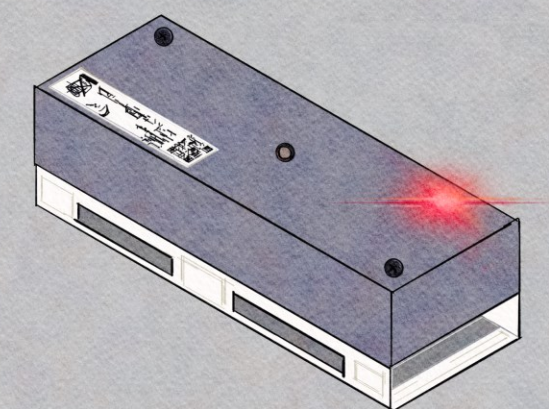

LED Signals

You can find an overview of the LED signals in the
traptice® Service Desk under "2 - Setting up a
traptice® insect trap".


traptice® insect

traptice® insect requires the following ports:

Description	Domains / URLs	outbound	inbound
Access to server	traptice.wains.info	https - 443 - tcp	
Time server	We recommend: *.wains.info de.pool.ntp.org if no NTP server is provided via DHCP or if the server specified in the DHCP settings is unreachable.	ntp - 123 - udp	
Domain Name System	It must be delivered via DHCP.	dns - 53 - udp	

The app requires the following ports for the production environment.

Description	Domains / URLs	outbound	inbound
Access to server	sp-traptice.wains.info traptice.wains.info We recommend: *.wains.info	https - 443 - tcp	

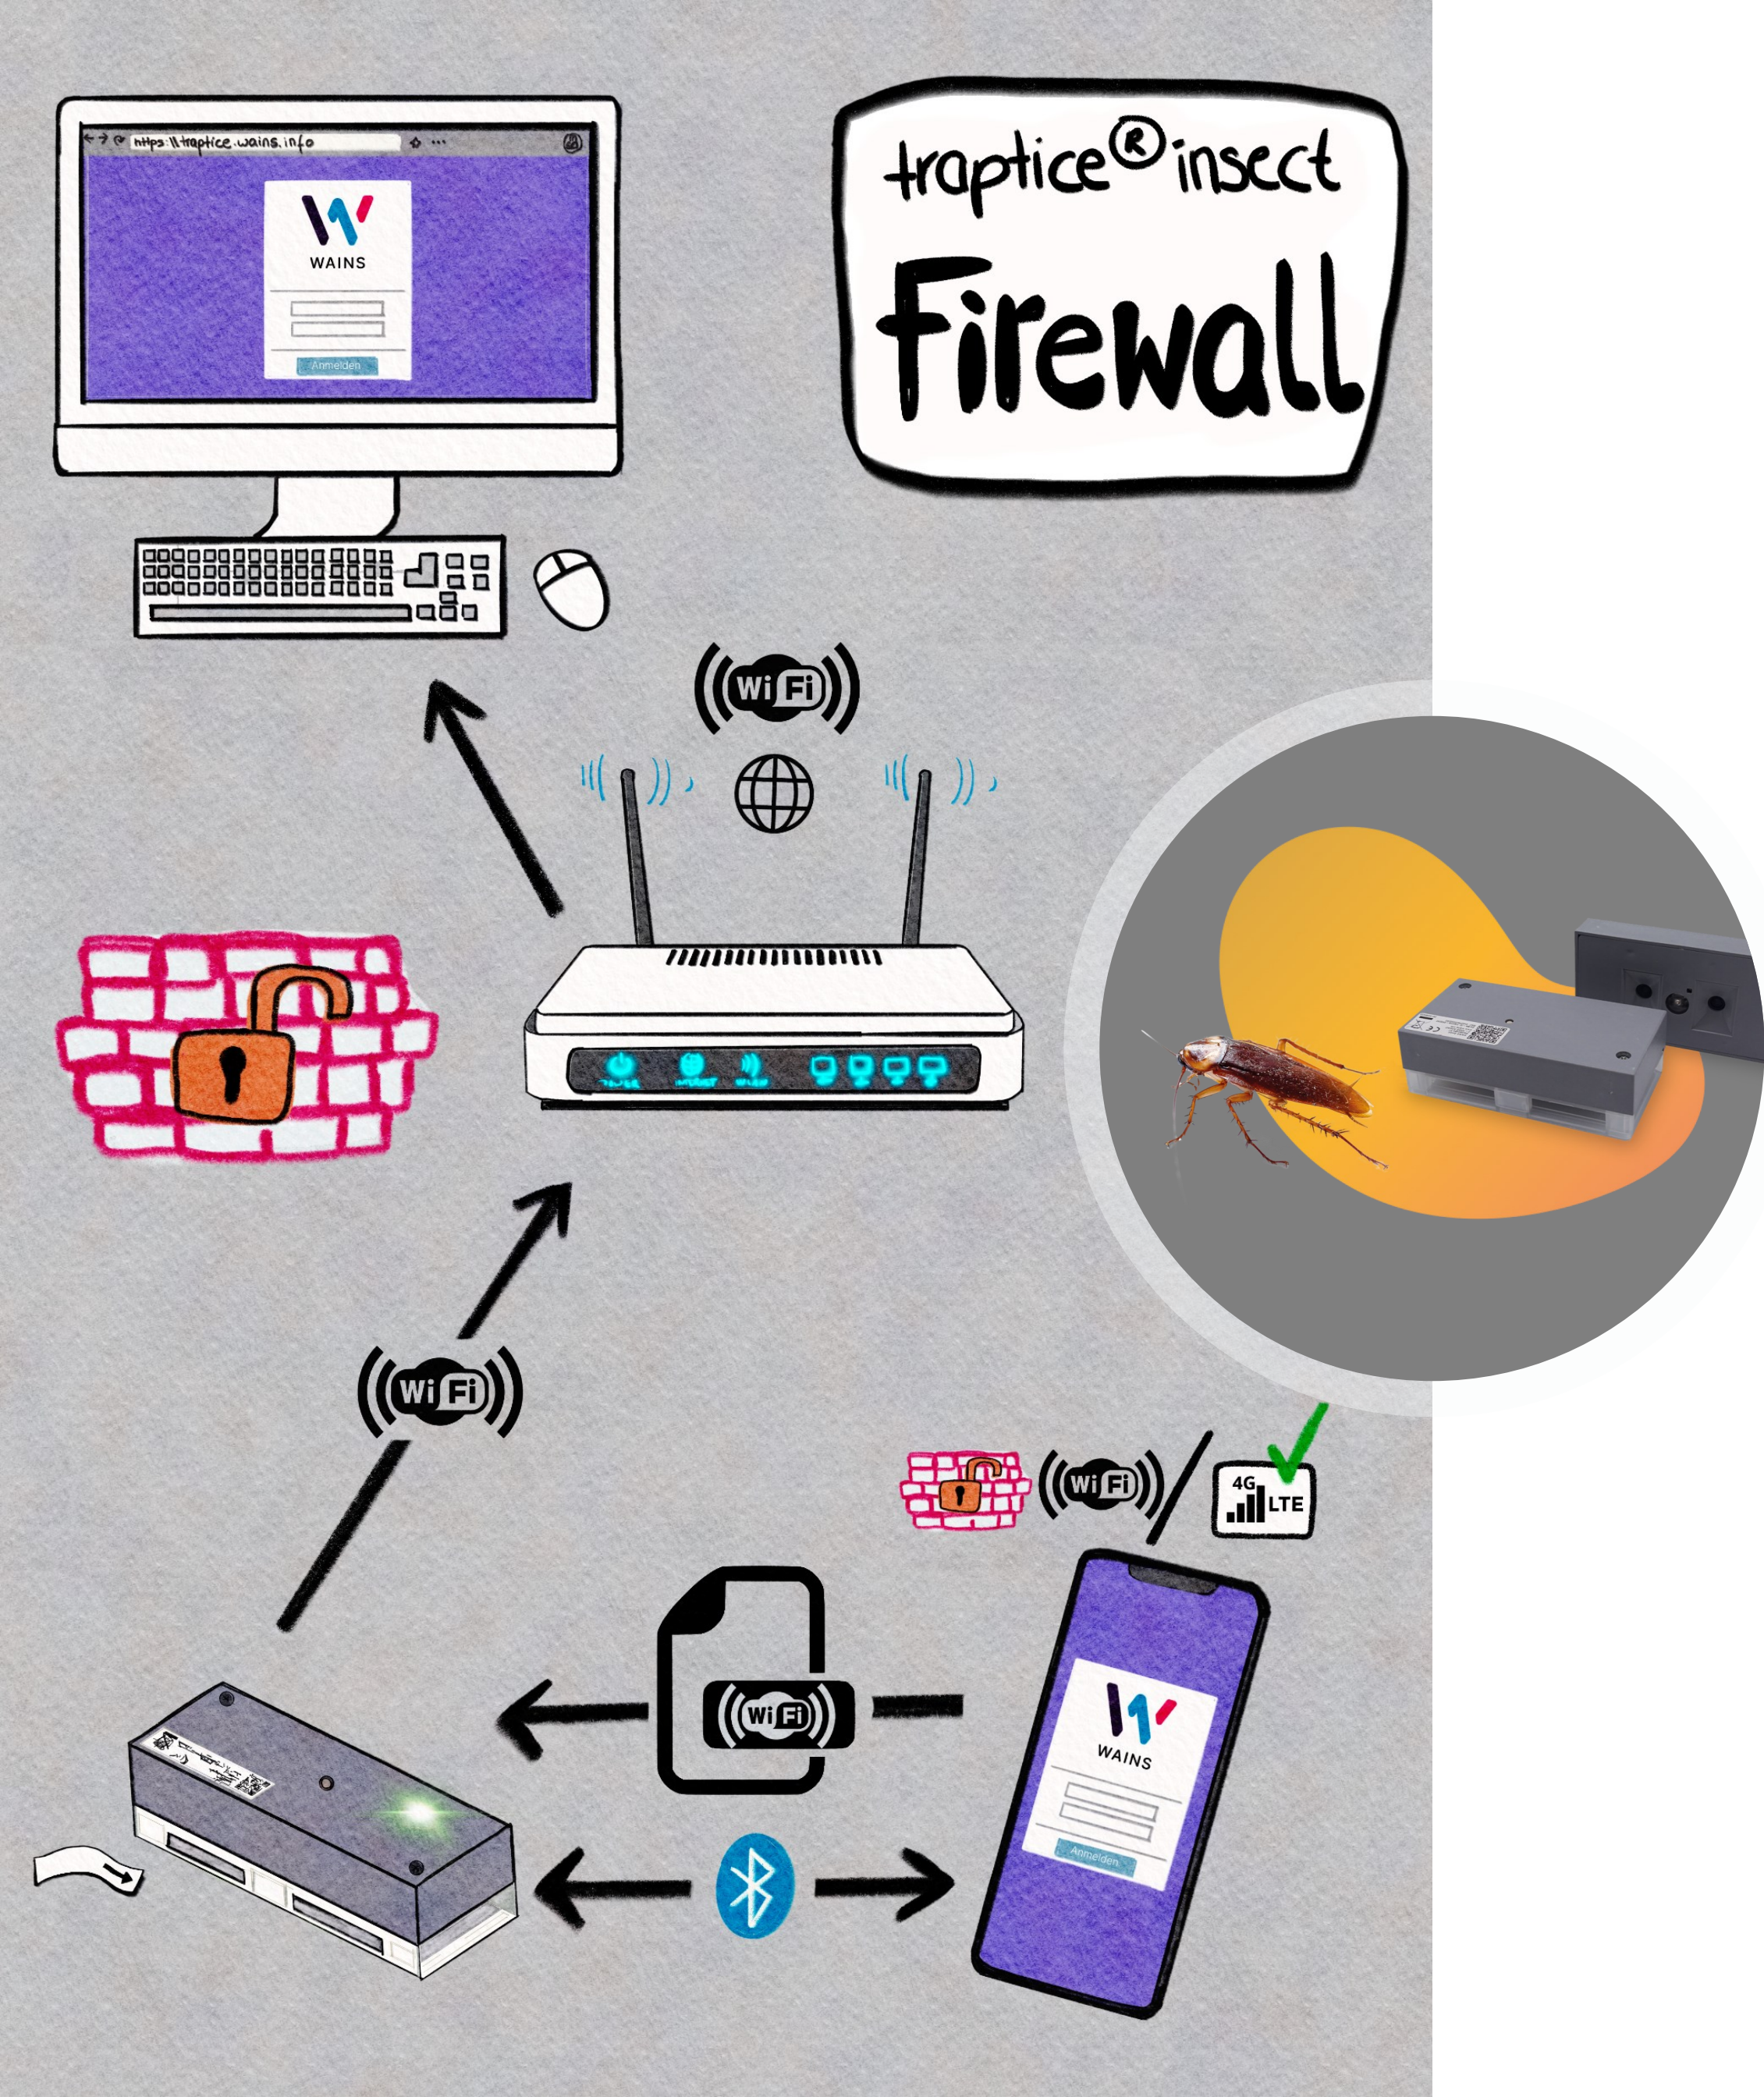

traptice® insect
Firewall